



Over Braided Liquid Tight Conduit (YF-705)

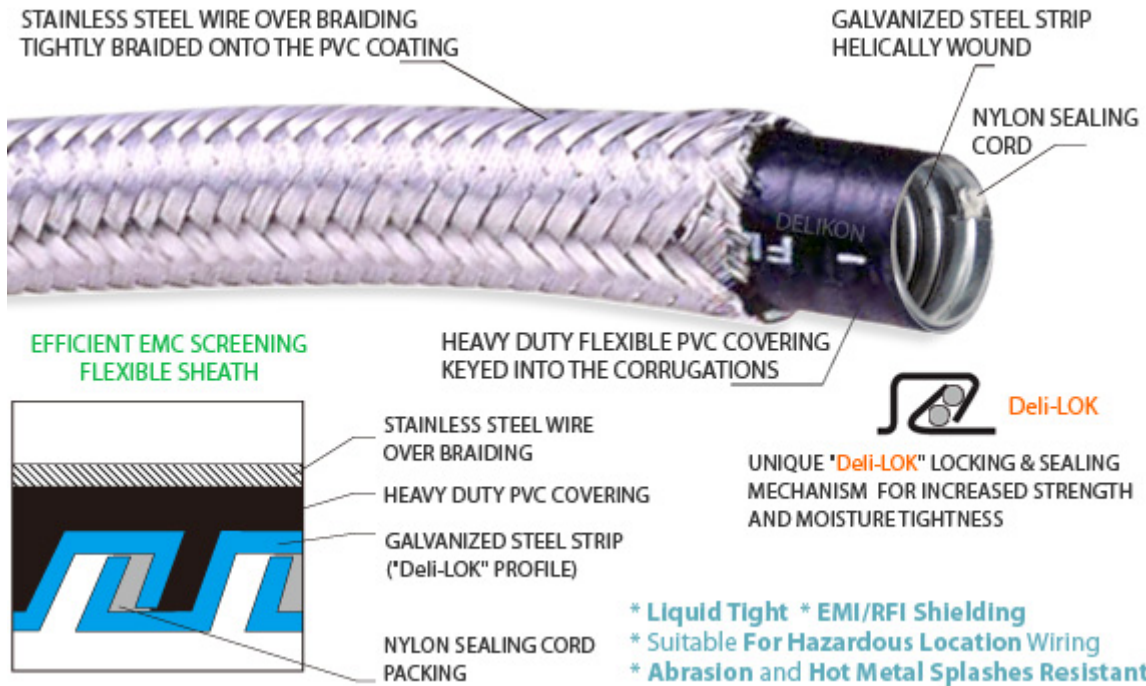

Type	Trade Size	I.D. (mm)		O.D. (mm)		Min Bending Radius (mm)	Meters/Coil
		MIN.	MAX.	MIN.	MAX.		
YF-70503	3/8"	12.3	12.8	18.5	19.0	75	50
YF-70504	1/2"	15.7	16.3	21.8	22.3	95	50
YF-70506	3/4"	20.7	21.2	26.2	27.7	120	30
YF-70510	1"	26.2	26.8	33.8	34.4	180	30
YF-70512	1-1/4"	34.7	35.4	42.4	43.2	230	20
YF-70514	1-1/2"	40.0	40.6	48.4	49.3	270	20
YF-70520	2"	51.3	51.9	60.4	61.3	300	15
YF-70524	2-1/2"	62.9	63.6	73.1	74.0	350	10
YF-70530	3"	77.9	78.7	88.9	89.9	500	10
YF-70540	4"	101.6	102.6	114.3	115.3	650	5
5" & 6" large size over braided liquid tight conduits are constructed with a fully interlocked strip for added strength and to prevent unraveling.							 Delikon Interlocked
YF-70550	5"	126.0	128.0	133.0	135.0	800	5
YF-70560	6"	149.0	151.0	156.0	158.0	1000	5

Over braided flexible conduit systems for steel mills and heavy industry wirings

Over Braided Flexible Metal Conduit resists abrasion or hot metal splashes for machine wirings