


InterLocked Flexible Stainless Steel Liquid Tight Conduit (**YF-806-SS**)



Type	Trade Size	I.D. (mm)		O.D. (mm)		Min. Bending Radius (mm)	Meters/Coil
		MIN.	MAX.	MIN.	MAX.		
YF-80602-SS	1/4"	6.2	6.7	11.4	11.9	50	100
YF-80603-SS	3/8"	12.5	13.0	17.8	18.3	60	50
YF-80604-SS	1/2"	16.1	16.6	21.3	21.8	80	50
YF-80606-SS	3/4"	20.7	21.3	25.9	26.4	100	50
YF-80610-SS	1"	26.3	26.8	33.3	33.8	150	30
YF-80612-SS	1-1/4"	35.0	35.5	42.6	43.1	180	20
YF-80614-SS	1-1/2"	40.0	40.5	47.6	48.0	220	20
YF-80620-SS	2"	51.0	51.5	60.3	60.8	250	15
YF-80624-SS	2-1/2"	63.0	63.7	72.2	73.0	300	10
YF-80630-SS	3"	78.0	78.8	88.2	89.0	450	10
YF-80640-SS	4"	101.8	102.8	113.2	114.0	600	5
YF-80650-SS	5"	126.0	128.0	133.0	135.0	750	5
YF-80660-SS	6"	149.0	151.0	156.0	158.0	900	5

Interlocking flexible *stainless steel* liquid tight conduit is made from a helical ribbon of stainless steel strip, and externally coated in smooth and durable PVC. DELIKON pvc covered stainless steel liquid tight conduit and stainless steel liquid tight conduit fittings are relied upon by leading petro organisations for protection of their electrical and data cables in Corrosion Environments.

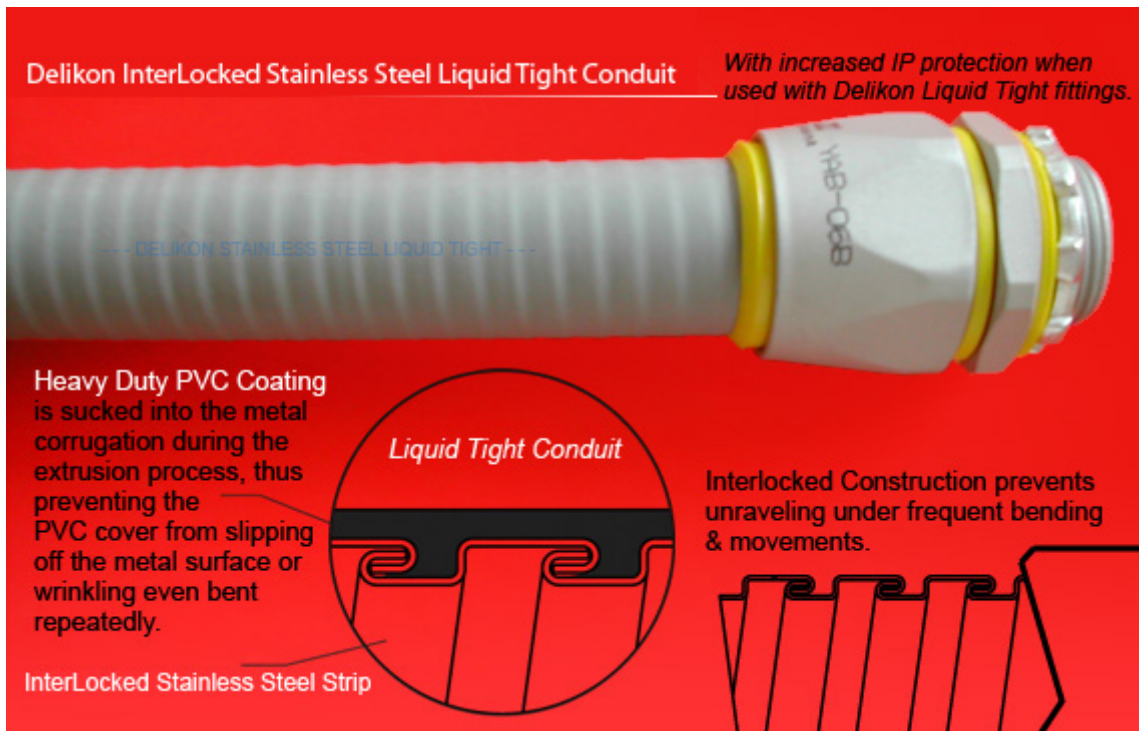

The strength of stainless steel, combined with its resistance to wear and corrosion, makes Delikon stainless steel liquid tight conduit and stainless steel connector a prime candidate for MINING AND QUARRYING, POWER GENERATION, CHEMICAL AND PETROCHEMICAL, FOOD AND BEVERAGE INDUSTRY, WATER TREATMENT INDUSTRY, PHARMACEUTICALS INDUSTRY, TRANSPORT INDUSTRY and more.

